

Installation Manual
P/N 07509MAX



2007.5-09 6.7L DODGE CUMMINS
Maximizer System

Installation Instructions

P/N 07509MAX
GDP Big Line Kit Installation

PLEASE READ ALL INSTRUCTIONS BEFORE BEGINNING INSTALLATION

Safety Guidelines!

WARNING! Always secure the vehicle from rolling.

WARNING! Always disconnect vehicle batteries before working on electrical components.

WARNING! Always wear safety glasses when operating power tools such as drills and grinders or using punches and chisels.

WARNING! Always properly secure fuel lines and wiring to prevent chaffing.

WARNING! Always have a fire extinguisher available when working with fuel systems.

PLEASE WORK SAFELY!

Maximizer Kit Contents




<u>Qty</u>	<u>Item Description</u>
1	3/8" Pressure Sender Tee
2	Straight PushLok to #6 JIC Fitting
1	90° PushLok to #6 JIC Fitting
2	Metric to JIC Stainless Adapters with o-rings
1	Metric to JIC Standard Adapter
1	Cummins Sealing Washer
10'	Parker 3/8" PushLok Hose
3	3/8" Hose Clamps

Please check your parts inventory against the above parts list before beginning your installation.

Preparation

- 1) Secure vehicle from rolling.
- 2) Disconnect both batteries.
- 3) Raise vehicle and support safely if needed.
- 4) Drain fuel filter housing into an approved container via the water/fuel separator.

Filter to CP3 Line Installation

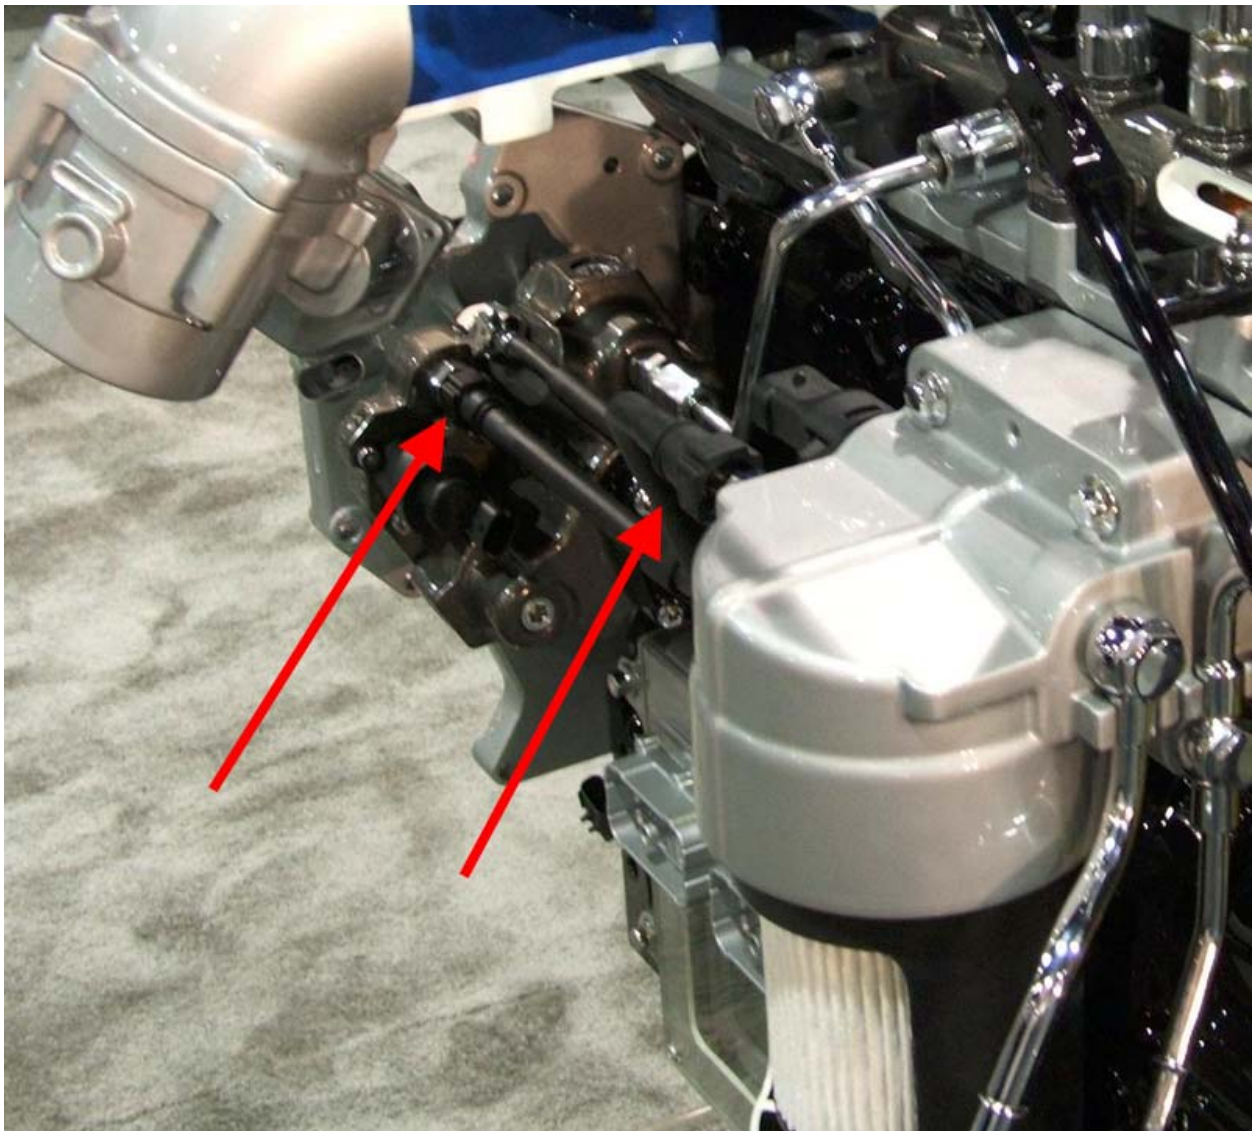

- 5) Completely remove the stock feed line and fittings from the front of the filter housing to the injection pump.
- 6) Install the stainless adapters in the injection pump inlet and the front of the fuel filter housing.
- 7) Install a Straight PushLok fitting in one end of the supplied hose.
- 8) Attach this fitting to the adapter in the front of the filter housing and tighten.
- 9) Loosely install the remaining straight fitting on the adapter installed at the injection pump inlet.
- 10) Cut the hose to length. Remove the straight fitting from the injection pump adapter. Install in the end of the hose coming from the bottom of the fuel filter. Reconnect the straight fitting to the injection pump adapter and tighten.

Frame Mounted Feed Line to Filter Inlet

- 11) Remove the banjo bolt and line from the rear of the stock fuel filter canister and replace with the remaining stainless metric adapter and Cummins sealing washer. Tighten the adapter.
- 12) Install the remaining 90° PushLok fitting in one end of the remaining hose. Attach this fitting to the metric adapter at the filter inlet. Route the hose in such a way as to allow connection to the stock metal supply line on the frame and tighten the fitting.
- 13) Locate the junction of the stock soft supply line and the metal line coming from the tank. Split the stock supply line with a utility knife and remove it from the steel supply line to reveal the beveled end.
- 14) Route the new supply hose attached to the filter inlet back down to the end of the stock metal line. Cut the hose to length and attach to the stock metal line using the supplied clamp.
- 15) Your installation is now complete.
- 16) If access is needed for a fuel pressure sender the supplied sender tee can be installed anywhere along the new feed line. Cut the new line, install the aluminum tee and secure with the supplied clamps.



Finishing Up

- 17) Secure all hoses.
- 18) Prime the system by bumping the starter but do not allow the vehicle to start. Wait 20 seconds or until the pump shuts off. Repeat this step three times to purge all air from the fuel system.
- 19) Start the engine and verify fuel pressure.
- 20) Check all connections for leaks and make sure all hoses are clear of moving parts.
- 21) Test drive the vehicle.

If you have any problem or questions please contact Glacier Diesel Power at 509-993-4923.

Thank you for your business and I look forward to helping you with your future accessory needs.

Sincerely,

Richard Martin
Glacier Diesel Power

GLACIER DIESEL POWER
DISCLAIMER OF LIABILITY

Other than as expressly set forth herein, Glacier Diesel Power (hereafter collectively, "SELLER") shall in no way be responsible for the PRODUCT'S proper use and service. In no event shall SELLER be liable for any special, incidental, indirect or consequential damages of any kind or nature, whether or not BUYER was advised of the possibility of damage, arising or resulting from the use or performance of the PRODUCT, and BUYER hereby waives any and all such claims.

BUYER acknowledges that he/she/it is not relying on SELLER'S skill or judgment to select or furnish goods suitable for any particular purpose and that SELLER has no liability that will extend beyond the scope of the limited warranty contained herein, and BUYER hereby waives all remedies or liabilities, expressed or implied, arising by operation of law or otherwise, (including, without limitation, any obligations of SELLER with respect to fitness for any particular purpose; merchantability; and special, incidental, indirect or consequential damages) or whether or not occasioned by SELLER'S negligence.

SELLER disclaims any warranty and expressly disclaims any liability for personal injury or damages related to BUYER'S use of the PRODUCT. BUYER acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and BUYER agrees to indemnify SELLER and hold SELLER harmless from any claim related to the PRODUCT and its use or performance. Under no circumstances will SELLER be liable for any damages, liabilities, costs or expenses incurred as a result of or by reason of the use, performance or sale of the PRODUCT, including, without limitation, any damages, liabilities, costs or expenses incurred by reason of BUYER'S negligence related to those uses of the PRODUCT.

SELLER assumes no liability regarding the improper installation or misapplication of the PRODUCT. It is the installer's responsibility to check for proper installation, and, if in doubt, contact the manufacturer.

LIMITATION OF WARRANTY

SELLER hereby provides the following limited warranty as to description, quality, merchantability, fitness for any product's purpose, productiveness, or any other matter of SELLER'S product sold herewith. The SELLER shall be in no way responsible for the product's open use and service and the BUYER hereby waives all rights other than those expressly written herein. This Warranty shall not be extended or varied except by a written instrument signed by SELLER and BUYER.

The Warranty is Limited to one (1) year from the date of sale and limited solely to the parts contained within the product's kit. All products that are in question of Warranty must be returned shipping prepaid to the SELLER and must be accompanied by a dated proof of purchase receipt. All Warranty claims are subject to approval by Glacier Diesel Power.

Under no circumstances shall the SELLER be liable for any labor charged or travel time incurred in diagnosis for defects, removal, or reinstallation of this product, or any other contingent expenses.

Under no circumstances will the SELLER be liable for any damage or expenses insured by reason of the use or sale of any such equipment.

IN THE EVENT THAT THE BUYER DOES NOT AGREE WITH THIS AGREEMENT: THE BUYER MAY PROMPTLY RETURN THIS PRODUCT, IN A NEW AND UNUSED CONDITION, WITH A DATED PROOF OF PURCHASE, TO THE PLACE OF PURCHASE WITHIN THIRTY (30) DAYS FROM DATE OF PURCHASE FOR A FULL REFUND. THE INSTALLATION OF THIS PRODUCT INDICATES THAT THE BUYER HAS READ AND UNDERSTANDS THIS AGREEMENT AND ACCEPTS ITS TERMS AND CONDITIONS.